

O2 mod –RECOVERY 1.3 and OS 1.5 Update

Section Ps2 V12 (Ps two SCPH-70004)

What is needed:

- A PsTWO V12 console with installed O2 mod
- A Playstation 2 console (from V3 to V11 model) already modded with any modchip
- “recovery_13_OS_15_from_mc.rar” (Downloadable on the website www.o2mod.com in the /downloads/flashupgrades/ section)

Instructions:

- Unpack the file in a folder ; the file contains 3 different files:
 - 1) The file rar “mc_recovery1_3_and_patch_1_5.rar”
 - 2) the file “updatemc.elf”
 - 3) the file readme.txt
- Unpack also this other rar file, you will further obtain two other files:
 - 1) mc_recovery1_3_and_patch_1_5.bin
 - 2) mc_recovery1_3_and_patch_1_5.cue
- Write the image cue e .bin on a cdrom with a burning program (for example NERO Burning Rom)
- Now , after having installed the O2 mod on a PsTWO v12, insert a memory card with at least 280kb free, in the slot 1 and turn on the console while the tray it's open.

In this way you will enter in “Recovery” mode and O2 will find the memory card and will write on the slot 1 AUTOMATICALLY (it will be needed around half a second from the turning on)a dir “O2” with all system files which are needed for the automatic update.

- Extract the Memory card from the PsTWO v12 and insert it in the playstation 2 console (model from v3 to v11) with already any modchip installed.
- Insert the disc containing the image file .cue e .bin and turn on the console.
- Follow the on screen instructions and press “X” every time you will be asked to install files on the memory card (This will happen for all the 3 files which need to be installed on the memory card.)


- Once the copy on memory card of the files (it will take few seconds), extract the memory card from the playstation 2 (v3-v11) and insert it again into the Pstwo v12 with installed the O2.

- Insert the memory card on the slot 1 of the pstwo.
- Just open the tray.

The pstwo will enter into the RECOVERY menu.

From the Recovery menu it is possible to do all the upgrades both of the BIOS (RECOVERY) and the OS (Operative System) of the O2 mod.

Automatically the O2 will find the update file on memory card and will start the AUTOFLASH procedure.

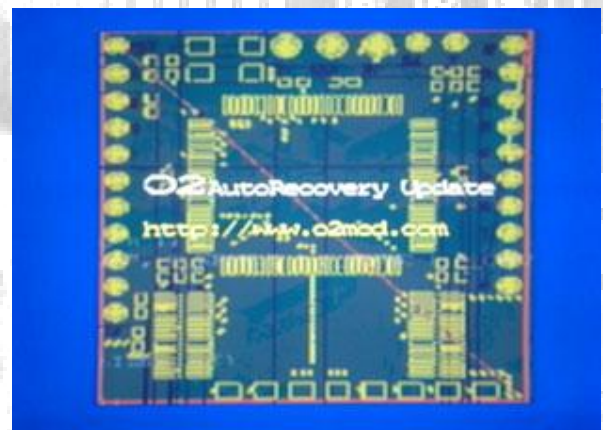

**During this phase
DON'T PRESS any
button and DON'T
TURN OFF OR
RESET the
console!!!**

AutoRecovery Update v1.0

Programming Bank #2

100

Operation Successfull

AutoRecovery Update v1.0

Programming Bank #1

100

Operation Successfull

AutoRecovery Update v1.0

Erasing Bank #2

100

AutoRecovery Update v1.0

Operation Successfull

**When on screen will
appear “Operation
Successfull” it is
possible to turn off
the console.**

Now the recovery Utility (BIOS) of the O2 mod has been updated to the 1.3 version.

Now we need to install the OS V.1.5 (operative system)

Select
"RECOVERY" from
the menu on the
right and then select
"#1 Recovery From
Memory Card"

Wait until appears
on screen "Operation
Successful".
Now it is possible to
reset or turn off the
console.
The upgrade now has
been completed.

